

ROTARY INTERNAL COMBUSTION ENGINE

The present invention relates to a rotary internal combustion engine.

Reciprocating engines have long been commercially available. These engines
5 utilize the well-known connecting rod-crank linkage to transform the
reciprocating movement of the piston, impressed by a series of explosions of
an air/fuel mixture within a cylindrical chamber in which said piston slides, into
a continuous rotary movement usable for the most varied applications. By
connecting these engines to alternators, couplings and mechanical members in
10 general, a wide range of activities can be performed, ranging from electrical
energy generation to driving mechanical vehicles, etc.

Reciprocating internal combustion engines present undoubted advantages, but
also disadvantages. In this respect, their overall efficiency, whether diesel
cycle or otto cycle engines, is very low. Essentially, a part of the useful
15 thermodynamic power is dispersed both to operate the complex valve control
systems and the valves themselves, and because of kinematic defects inherent
in the connecting rod-crank system, such as dead centres and a piston speed
which varies substantially between the bottom dead centre and the top dead
centre, hence involving energy wastage for accelerating and decelerating the
20 piston.

To eliminate the problems arising from the connecting rod-crank linkage, rotary
engines have been developed, of which the most widespread is that commonly
known as the Wankel engine. In this type of engine, the rotor acts as a piston
and, provided with lobes acting as explosion chambers, is directly in contact
25 with the stator walls; the rotor moves within the stator with planetary motion
imposed on it by a pair of gearwheels, of which the first is concentric to and
rigid with the rotor, while the second is concentric to the output shaft and rigid

with the stator. A problem of the Wankel power unit is the radial seal of the stator-rotor system, which is obtained by U-shaped vanes mounted in suitable grooves parallel to the drive axis, and which are considerably stressed because the kinematics of the rotor movement and the particular shape of the stator.

5 Moreover the Wankel engine involves fairly complex kinematics and is not easy to construct and maintain.

Both in the reciprocating engine and in the Wankel engine the fuel-air mixture is compressed at each cycle; in the former the compression stage directly follows the intake stage. In the latter the intake stage is also followed by the
10 compression stage, compression being determined by the orbital movement which the rotor undergoes relative to the stator. The compression ratio is predetermined both for the former and for the latter engine, and cannot be varied other than by mechanical adjustments to the dimensions of the moving members, such as the connecting rod or the crank in the former case or the
15 dimension of the gearing on the output shaft or on the rotor in the latter. In particular, the compression ratio can be increased in both types of engine for example by suitable compressors, possibly of radial turbine type, to increase the pressure of the intake gas, however it cannot be decreased.

The technical aim of the present invention is therefore to provide a rotary
20 engine by which the stated technical drawbacks of the known art are eliminated, including vibration.

Within the scope of this technical aim, an object of the invention is to provide a rotary engine without dead centres, which is simple and economical, and of small dimensions and low weight compared with conventional internal
25 combustion engines.

Another object of the present invention is to provide a rotary engine which enables the engine compression ratio to be chosen by simply varying the

intake gas pressure, without any mechanical constraints imposed by the engine kinematics.

Another object of the invention is to provide a rotary engine which is substantially simple, safe and reliable.

- 5 The technical aim, together with these and further objects are attained according to the present invention by a rotary engine in accordance with the accompanying claims.

Further characteristics and advantages of the invention will be more apparent from the description of a preferred but non-exclusive embodiment of the rotary engine according to the present invention, illustrated by way of non-limiting
10 example in the accompanying drawings, in which:

Figure 1 is a simplified schematic section through the stator/rotor unit of a preferred embodiment of the rotary engine of the present invention;

Figures 2-9 are simplified schematic views showing the various stages of the
15 operating cycle of the engine of Figure 1;

Figure 10 is a simplified perspective view of the stator/rotor unit of the present rotary engine with some parts enlarged;

Figure 11 is a section through the engine of the present invention;

Figures 12, 13, 14, 15 show various embodiments of the engine of the present
20 invention;

Figures 16, 17, 18 show various embodiments of parts of the rotary engine of the present invention;

Figure 19 shows different embodiments of parts of the engine of the present invention; and

25 Figure 20 shows a different embodiment of the rotary engine.

With reference to the said figures, and in particular to Figure 1, these show a rotary engine indicated overall by 1.

A stator body 2 presents in its interior a substantially spherical chamber 3 and a cylindrical cavity 4, which traverses the stator body 2 but is not aligned with the axis 10a on which the centre 10 of the spherical chamber 3 lies, this latter acting as a housing and guide for a rotor 5 comprising a output shaft 6, torsionally rigid with a substantially spherical member 7 (similar to but of smaller diameter than the spherical chamber 3) the envelope of which presents substantially spherical symmetry about the axis of rotation 9. The stator body 2 is housed within the chamber 3, the geometry of the chamber 3 and of the cylindrical cavity 4 of the stator 2 being such that the spherical body 7 grazes the surface of the spherical chamber 3 at a point P. The spherical body 7 presents two surface recesses 8a, 8b disposed 90° apart, they extending in the direction of the axis of rotation 9 of the output shaft 6 and at least partly within the output shaft 6 itself. Specifically, with reference to Figure 10 the recess 8a passes through the entire output shaft 6 on the left side 6a and only partly enters on the right side, whereas the recess 8b passes through the output shaft on the right side 6b and only partly enters on the left side 6a. Two split seal rings 11a, 11b are housed in the surface recesses 8a, 8b, to slide against the walls of the chamber 3 and create four separate sealed chambers A, B, C, D, each of which is bound lowerly by the surface of the spherical body 7, upperly by the inner surface of the chamber 3, at its sides by suitable seal gaskets 12 positioned between the output shaft 6 and the common regions between the spherical chamber 3 and the cylindrical cavity 4, at the rear by the first split ring 11a and at the front by the second split ring 11b. The split rings 11a, 11b adapt to the inner surface of the spherical chamber 3 to ensure sealing and hence isolate the four separate chambers A, B, C, D from each other.

The output shaft 6 is free to rotate about its axis 9, which is parallel to and fixed with respect to the axis 10a of the stator 2, this rotation causing the separate

chambers A, B, C, D to slide relative to the inner surface of the spherical chamber 3, so that with clockwise rotation of the shaft 6, a fixed point on the stator pertains in sequence firstly to the separate chamber A, then to the separate chamber D, then to C and then to B until it returns to form part of the separate chamber A. At fixed points on the inner surface of the spherical chamber 3, the stator 2 presents ports 20a, 21a, b, 22, 23a, b, c, d, e, f, 26, 270 which, with the rotation of the shaft, are connected at any given time to one or other of the separate chambers A, B, C, D.

With reference to Figures 3-9, the cycle of this engine can be illustrated in the following manner:

- the split ring 11a, dragged by the spherical body 7, closes a scavenging port 20a, further described hereinafter;
- a compressed air/fuel mixture is injected via a first feed port 21a; compression can be by any compressor (for example radial);
- 15 - the split ring 11a, dragged by the spherical body 7, closes the first feed port 21a and a spark plug positioned within the port 22 ignites the mixture present in the chamber A;
- the expansion (Figure 3) generates on the walls of the chamber A a sudden pressure increase, which then creates on the split ring 11b a resultant force F_1 , this being transferred to the rotor by the split ring 11b itself to create a drive torque on the output shaft 6, with an arm m and modulus $m \cdot F$;
- 20 - the expansion proceeds, by which a slightly variable but positive torque is transferred to the output shaft during the whole of this stage. In particular (see Figure 4) the forces which act on all the walls of the chamber A do not produce a drive torque, whereas of those exerted on the rings 11a, 11b only the resultant F_1 of the pressure exerted on the area H of the split ring 11b produces a torque, that exerted on the remaining section G being balanced by

that acting on the equal area L of the split ring 11a. The torque acting on the output shaft is consequently $m_1 \cdot F_1$;

- exhaust (Figure 6) commences when the split ring 11b reaches a first exhaust port 23a, the combustion products being eliminated radially via the exhaust ports 23a, b, c, d, e, f preferably connected together by a main exhaust manifold 24;
- scavenging commences with the closure of the exhaust port 23f by the split ring 11b, and with the injection of fresh air via the scavenging port 20a. This injected air expels the residual exhaust gases via the separate scavenging exhaust port 26; the cycle can then recommence.

Specifically, for each revolution of the output shaft 6, four expansions take place, and hence four cycles for each revolution, one cycle for each separate chamber A, D, C, B with virtually continuous combustion which provides a high torque already available at low r.p.m.

- 15 The shape, the inclination and the number of ports present on the stator 2 can be varied according to technical requirements related to pressure drops, idling flow rates (for example a port intercepted by a valve 27 can be provided to allow idling without continuous ignition) etc. For example with regard to the exhaust, six ports have been provided. This does not mean that seven or more cannot be provided, to optimize pressure drops during exhaust. In the same manner all or some of the ports 20a, 21a, b, 22, 23a, b, c, d, e, f, 26, 270 can be intercepted by electromechanical or mechanical valves to optimize the cycle stages.

- 25 Modifications and variants, in addition to those already stated, are evidently possible, for example the chamber 3 present in the stator 2 and the body 7 torsionally rigid with the output shaft 6 can have different shapes, for example ellipsoidal (Figure 12) or cylindrical (Figure 13), hence with an envelope of

circular symmetry.

In the same manner the surfaces of the spherical body 7 can present notches 40, recesses 41, protuberances 42, slots 44 to improve engine efficiency or to facilitate combustion of the air/fuel mixture, so that again in this case the envelope maintains circular symmetry.

Again, the seal rings (11a, 11b) can consist of a substantially annular rigid part 110 and two semiannular elastic seal parts 111, 112. This arrangement results in more reliable transmission of the force generated by the gas expansion to the spherical body 7, so that there is no longer the need for compromise between the necessary mechanical strength of said components and the elasticity required to achieve a seal against the inner surface of the spherical chamber 3.

The shape of the contact surface between the split rings 11a, 11b and the inner surface of the spherical chamber 3 can be varied (Figure 16), for example it can be square, rounded, bevelled, sharp-edged, etc.

In the same manner the elastic force exerted on the seal rings 11a, 11b can be provided by one or more elastic means 45 acting on said rings (Figure 17), and said rings 11a, 11b can consist of several layers 46a, b, c possibly of different material.

Moreover, if the seal rings 11a, 11b comprise a rigid annular part 110, elastic means 45 can be interposed between said rigid annular part 110 and the elastic semiannular sealing parts 111, 112 (suitably shaped as in Figures 16, 17 and 18), to ensure a sealing force.

In a different embodiment the rigid ring 110 can consist of two rigid half-rings 330, 340 connected together by appendices 331, 341 passing through the spherical body 7. As in the preceding case, these rings comprise semiannular elastic sealing parts 111, 112 disposed at their ends. The appendices 331,

341 are provided with rotary pins 310, 320 which alternately rest on a suitably shaped guide 120 rigid with the stator 2 via a through support 300 concentric with a recess provided in one side of the shaft 6. The half-rings 330, 320 hence discharge the centrifugal force generated by the rotation of the rotor 5
5 onto the guide 120 instead of onto the inner surface of the stator 2.

Figure 19 shows, possibly loaded by springs 45, seal means 140 such as gaskets and the like for ensuring sealing by the seal rings 11a, 11b.

A rotary engine conceived in this manner is susceptible to numerous modifications and variants, all falling within the scope of the inventive concept.

10 For example, in a different embodiment the body 7 can act as the stator, with the chamber 3 rotating about its axis 10a.

Moreover all details can be replaced by technically equivalent elements.

In practice the materials used, and the dimensions, can be chosen at will according to requirements and to the state of the art.

CLAIMS

1. A rotary engine comprising two components, namely a stator (2), and a rotor (5) torsionally rigid with an output shaft (6), characterised in that, of said stator (2) and said rotor (5), a first component (2) presents a chamber (3) the surface of which presents circular symmetry about an axis (10a) of said first component (2), and a second component (5) is formed from a body (7) which is disposed in the interior of said chamber (3), and of which the envelope presents circular symmetry about an axis (9) of said second component (5), said envelope being similar to said chamber (3), said axes (9, 10a) being fixed, mutually parallel and non-aligned, one of said components rotating about its axis (9).
2. An engine as claimed in claim 1, characterised in that the first component is a stator (2) and presents a chamber (3) the surface of which presents circular symmetry about its stator axis (10a), and the second component is a rotor (5) which presents an axis of rotation (9) eccentric to the stator axis (10a) and is formed from a body (7) which is torsionally rigid with an output shaft (6) and of which the envelope presents circular symmetry about the axis of rotation (9), said envelope being similar to the stator chamber (3).
3. An engine as claimed in claim 2, characterised in that the stator (2) presents a cylindrical cavity (4) for housing the output shaft (6).
4. An engine as claimed in claim 3, characterised in that seal means (12) are present between the cylindrical cavity (4) housing the output shaft (6) and the body (7).
5. An engine as claimed in claim 2, characterised in that the chamber (3) present in the stator (2) is substantially spherical with its centre (10) lying on the axis (10a), or is ellipsoidal or cylindrical.
6. An engine as claimed in claim 2, characterised in that the body (7) has

a substantially spherical, ellipsoidal or cylindrical envelope, and has circular symmetry.

7. An engine as claimed in claim 2, characterised in that the body (7) presents surface recesses (8a, b) acting as guides for seal means (11a, b) which slide along the surface of the chamber (3) as the body (7) rotates, and which together with the surface of the body (7) and of the chamber (3) define sealed chambers (A, B, C, D), said chambers "sliding" relative to the surface of the stator chamber (3) as the output shaft (6) rotates.

8. An engine as claimed in claim 6, characterised in that the surface recesses (8a, b) are disposed at 90° apart in the direction of the axis of rotation (9).

9. An engine as claimed in claim 2, characterised in that ports (20a, 21a, b, 22, 23a, b, c, d, e, f, 26, 270) are present in the surface of the chamber (3) and may be provided with valve means (27).

10. An engine as claimed in one or more of the preceding claims, characterised in that the seal means (11a, b) are split rings.

11. An engine as claimed in one or more of the preceding claims, characterised in that the seal means (11a, b) comprise rigid rings (110) and elastic sealing parts (111, 112).

12. An engine as claimed in one or more of the preceding claims, characterised in that the seal means (11a, b) present sliding ends of different shape and materials.

13. An engine as claimed in one or more of the preceding claims, characterised in that the seal means (11a, b) urged by elastic means (45), to improve the seal against the surface of the chamber (3).

14. An engine as claimed in one or more of the preceding claims, characterised in that the rigid rings (110) present means (120) for discharging

the centrifugal force acting on them.

15. An engine as claimed in one or more of the preceding claims, characterised in that the seal means (11a, b) present further seal means (140) to ensure sealing against the walls of the surface recesses (8a, b).

5 16. An engine as claimed in one or more of the preceding claims, characterised in that the body (7) presents surface notches (40), recesses (41), protuberances (42), or slots 44 to improve engine efficiency.

17. A method for operating an engine claimed in one or more of the preceding claims, characterised in that:

- 10 - with the output shaft (6) rotating, compressed air is injected via a first feed port (21a) while fuel is injected via a second feed port (21b), or an air/fuel mixture is injected via only the port (21a);
- an ignition means, present in the port (22), thus ignites the contents of the chamber A;
- 15 - the mixture expands to create within the chamber A a pressure, the resultant of which is a force which when transferred to the body (7) creates a variable drive torque on the output shaft (6);
- the exhaust gas mixture is discharged when the chamber A, dragged by the rotation of the shaft, communicates with an exhaust port (23a) and continues to
- 20 discharge via subsequent ports (23b, c, d, e, f).

18. An engine as claimed in claim 1, characterised in that said first component is a rotor and rotates about its axis 10a, the second component being a stator.

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

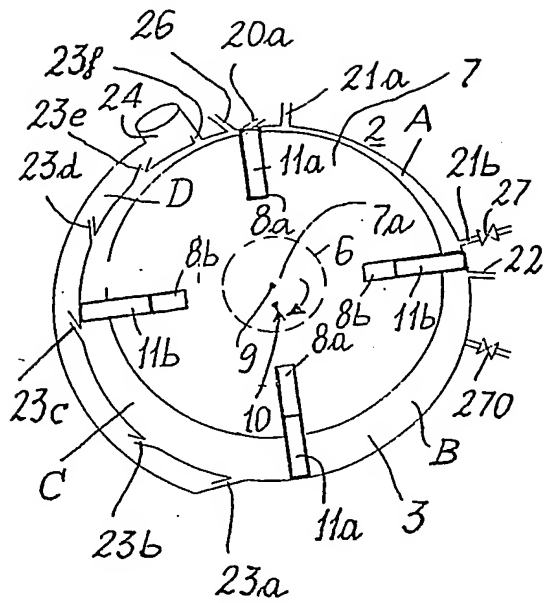


FIG. 2

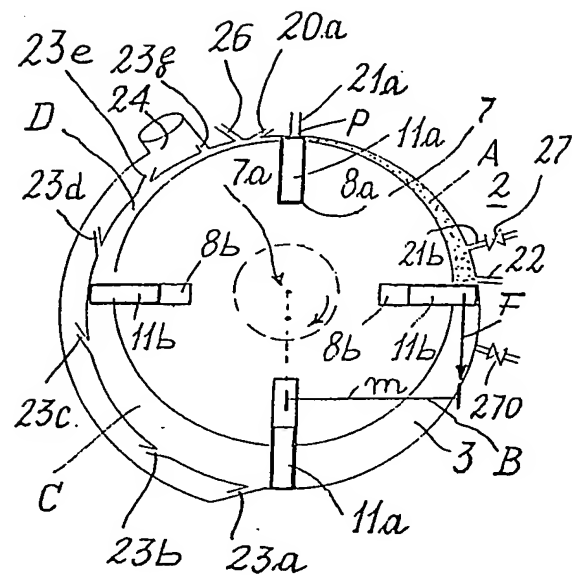


FIG. 3

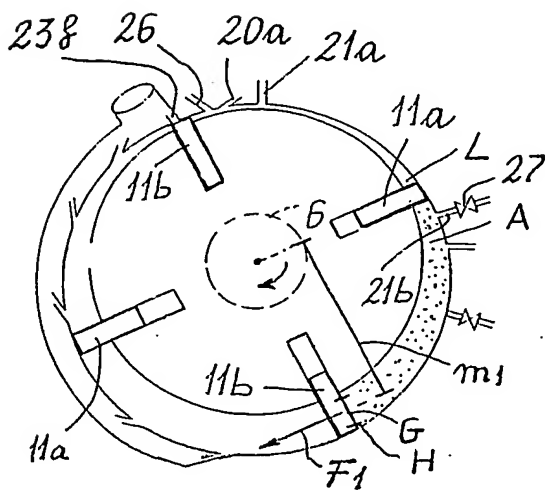


FIG. 4





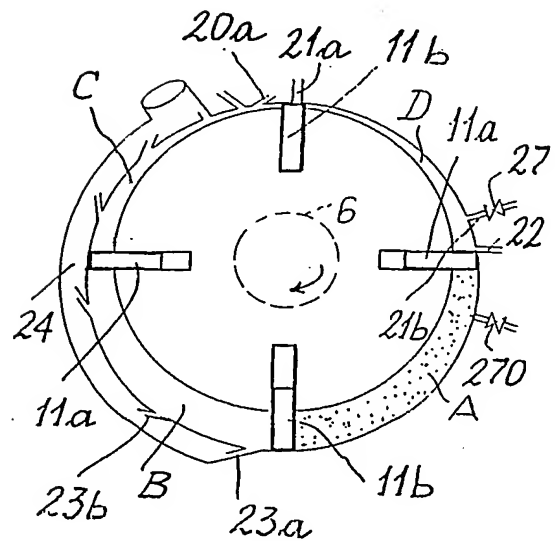


FIG. 5

THIS PAGE BLANK (USPTO)

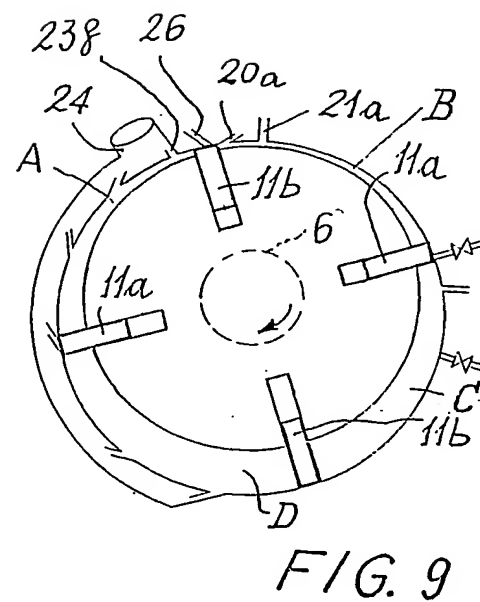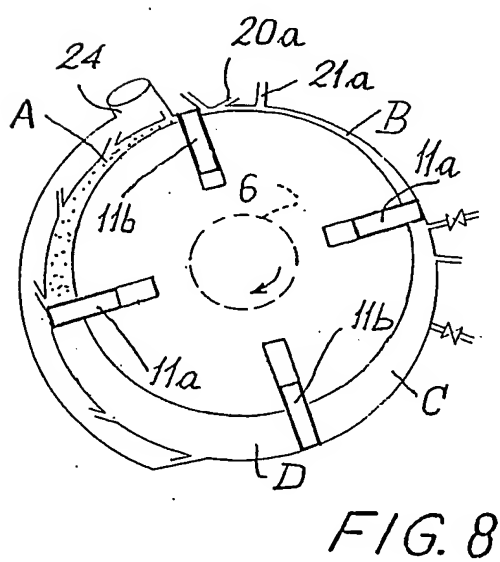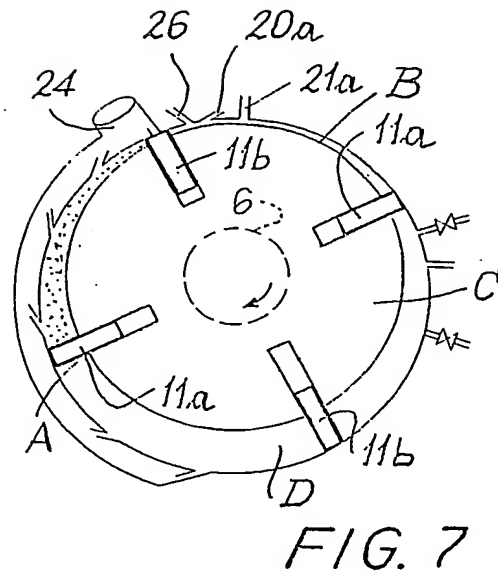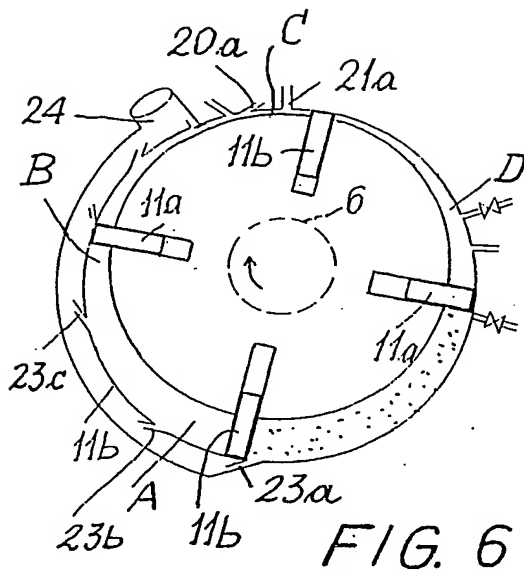

THIS PAGE BLANK (USPTO)

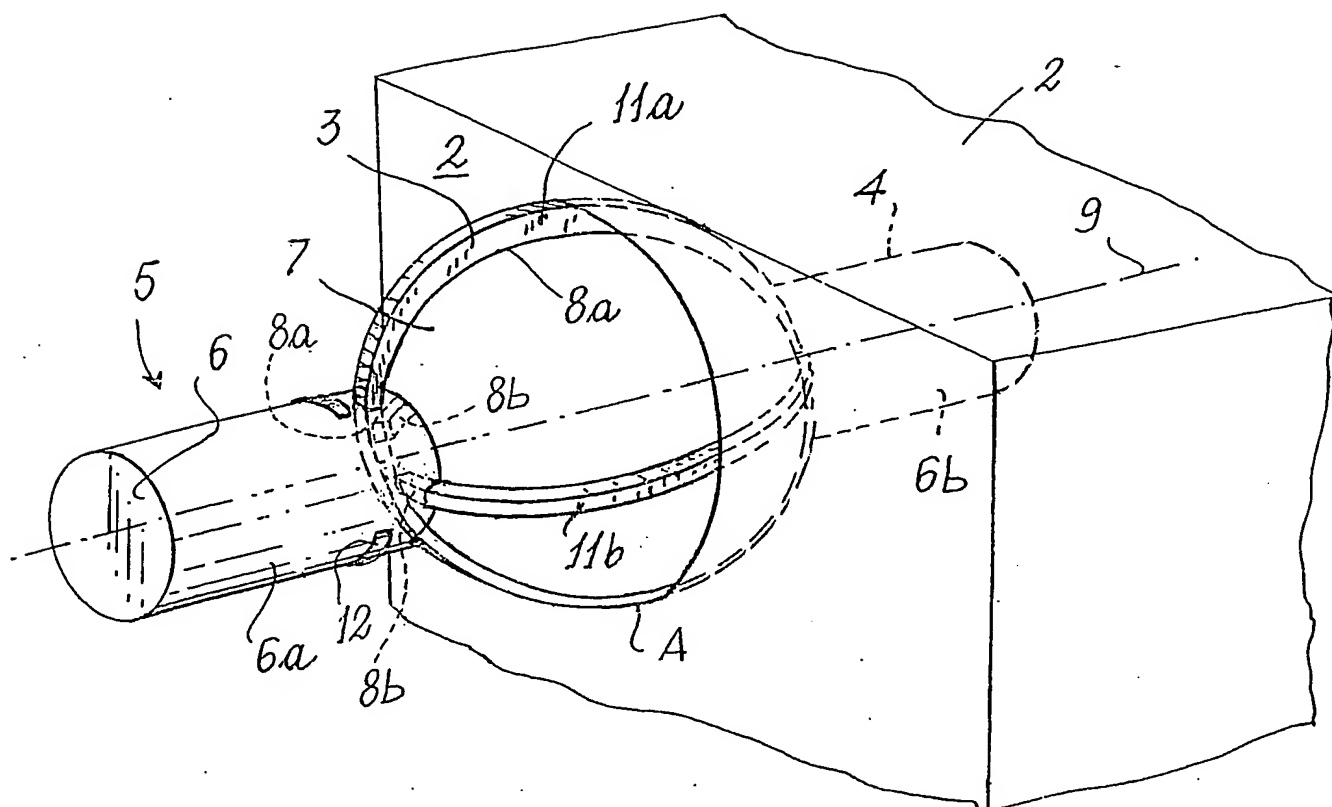


FIG. 10

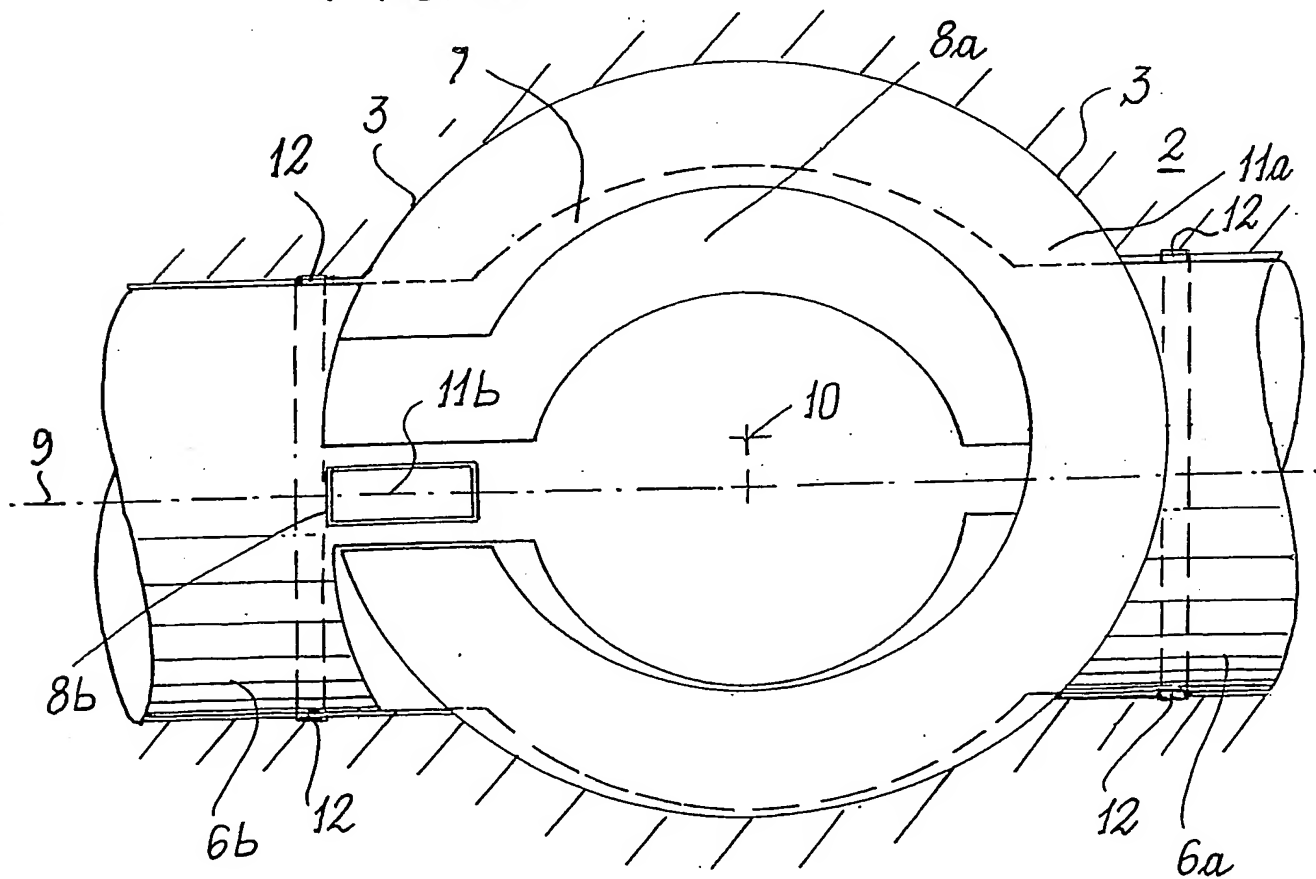


FIG. 11

THIS PAGE BLANK (USPTO)

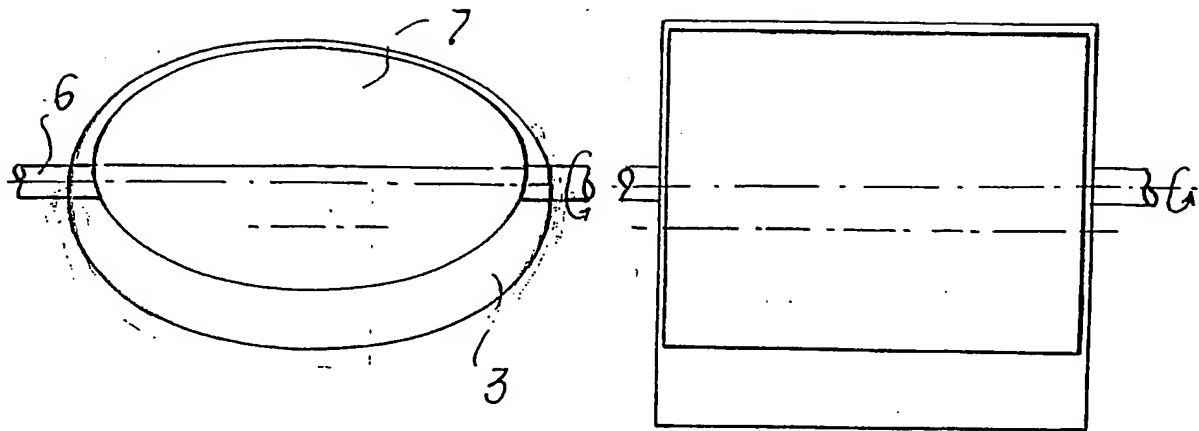


FIG. 12

FIG. 13

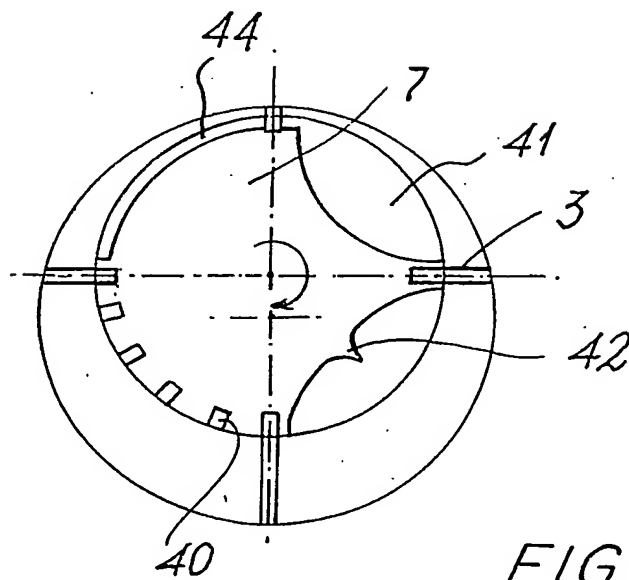


FIG. 14

www.moscow.museum.ru

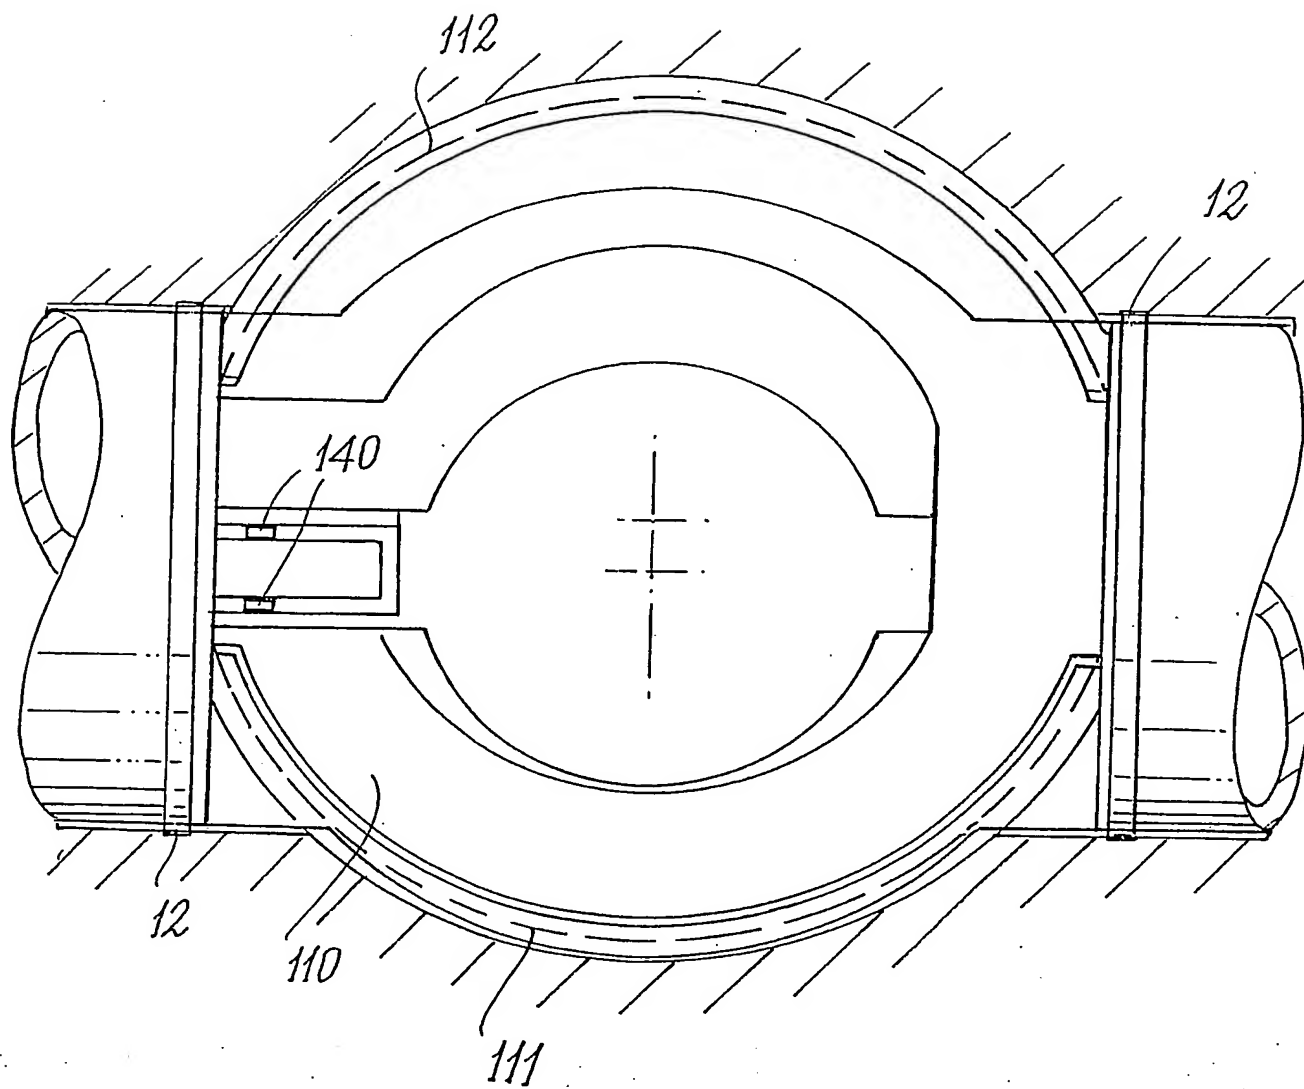


FIG.15

THIS PAGE BLANK (USPTO)

FIG. 16

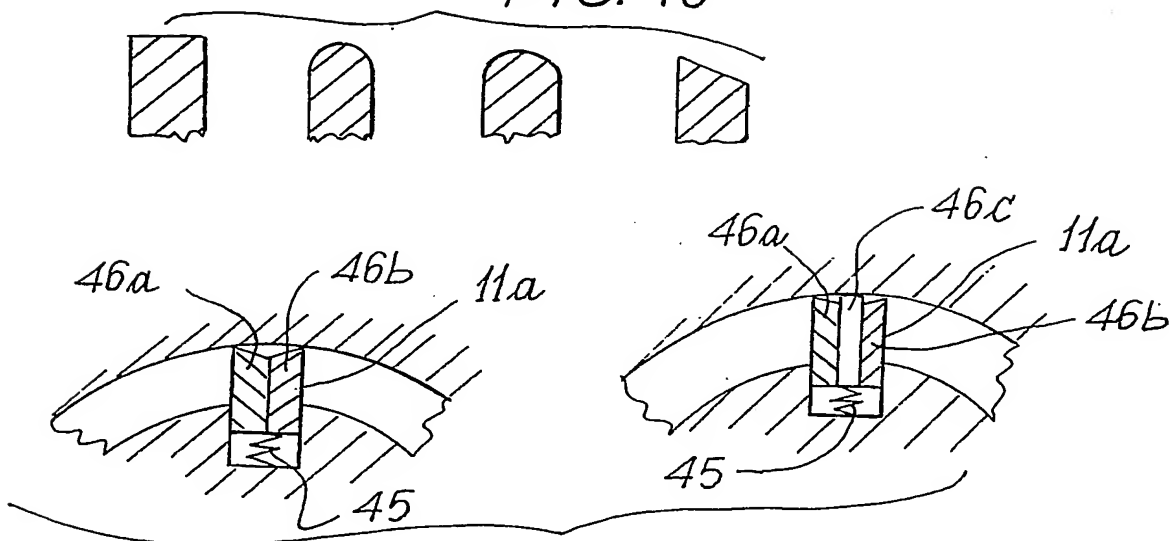


FIG. 17

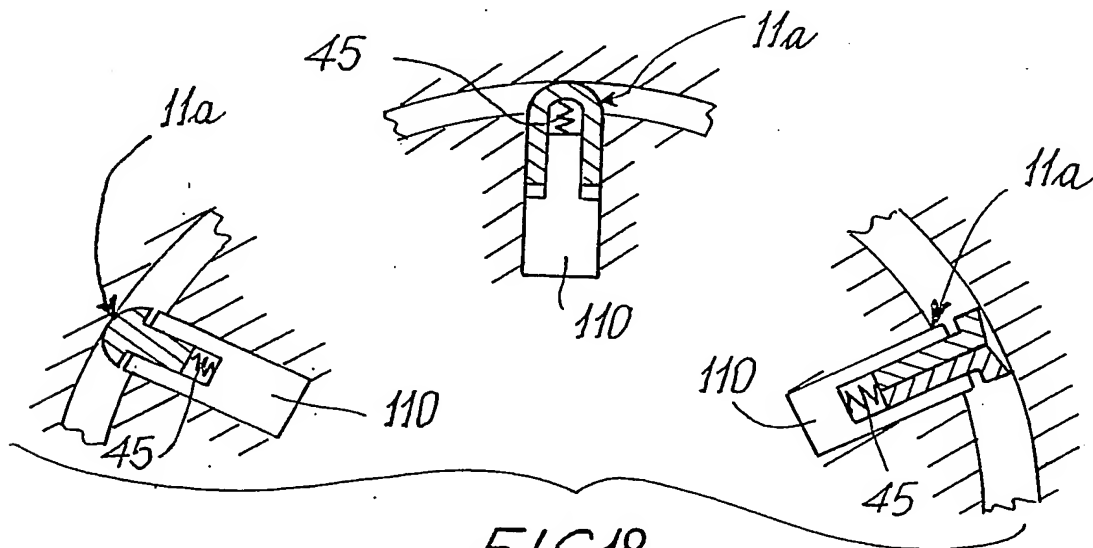


FIG. 18


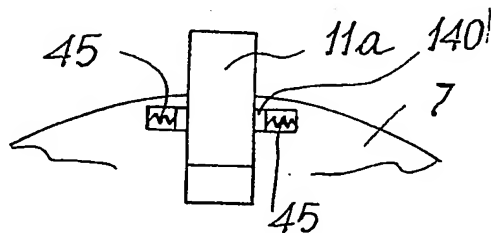


FIG. 19

THIS PAGE BLANK (USPTO)

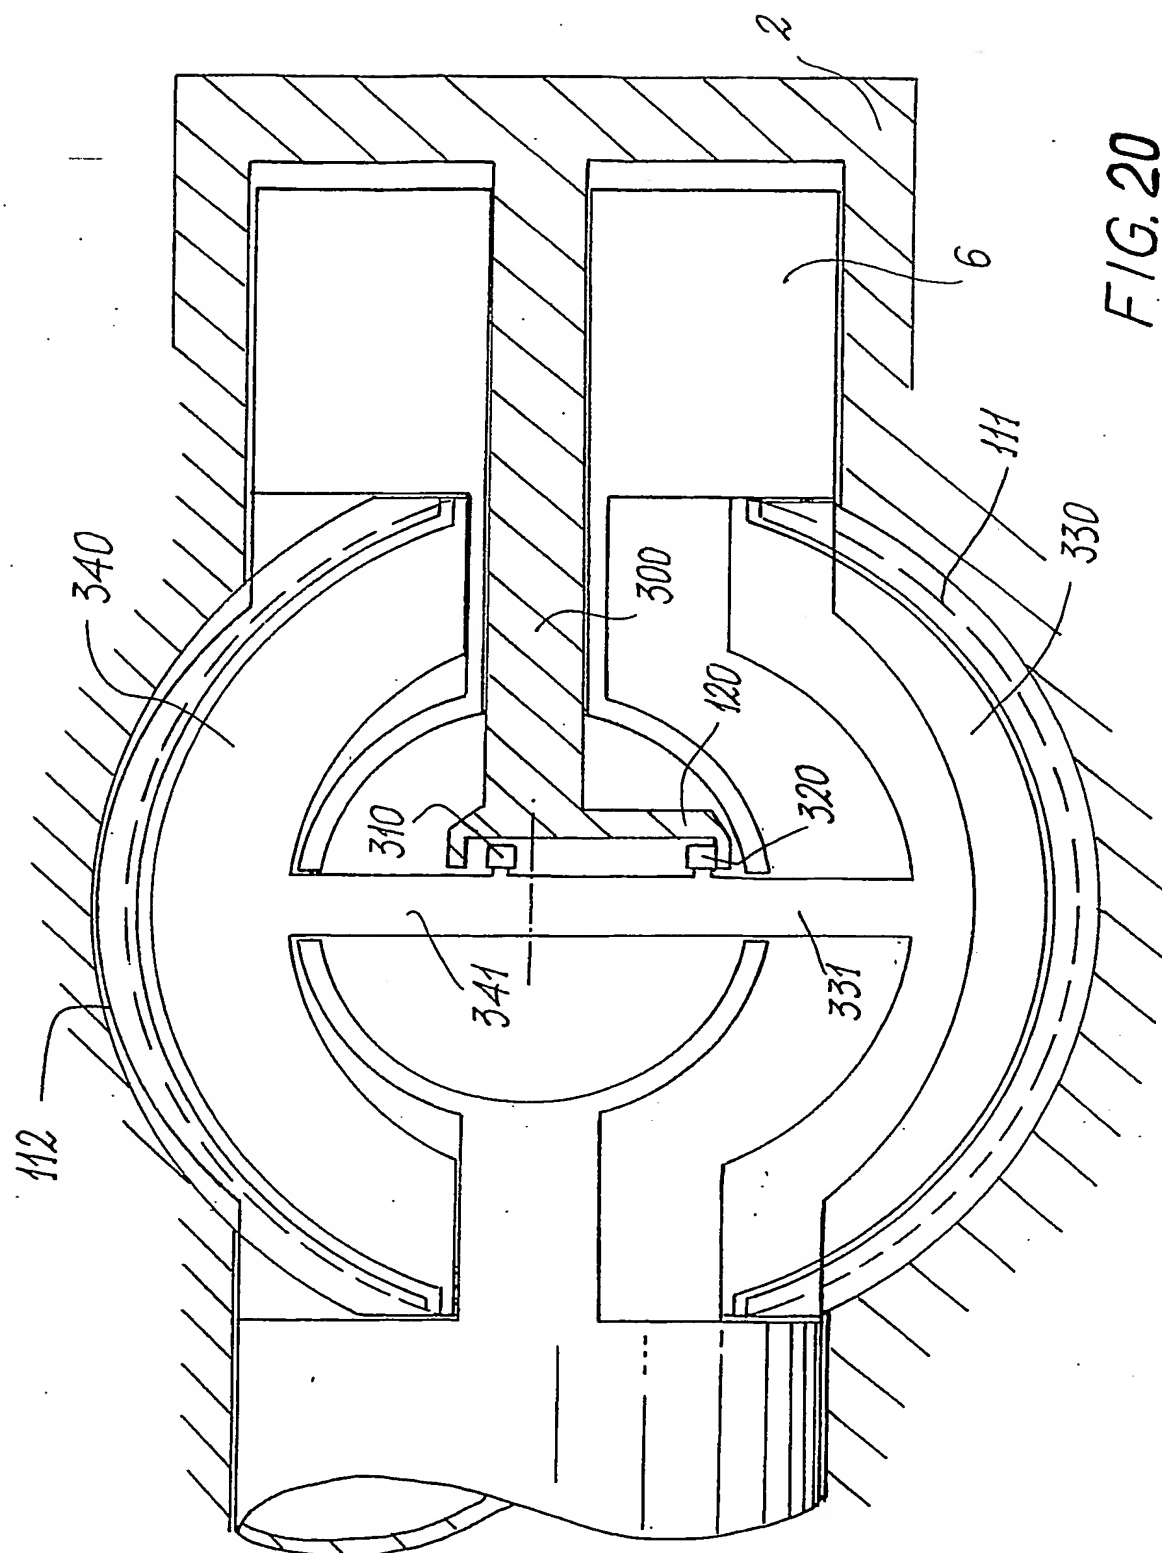

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/006374

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F02B53/00 F01C1/344 F01C19/02 F01C21/10 F01C11/00
F01C21/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F02B F01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 197 44 812 A (HEROLD & SEMMLER TRANSPORTTECH) 8 April 1999 (1999-04-08) column 1, lines 3-7 column 3, line 46 - column 4, line 14 figures 1,2	1-9,18
X	DE 44 22 720 A (MORGENROTH INGOLF DIPL ING) 4 January 1996 (1996-01-04) column 1, lines 8-15 column 1, lines 29-31 figure 1	1-9,18
X A	WO 03/036047 A (ENGINION AG ; CLEMENS HERBERT (DE)) 1 May 2003 (2003-05-01) figures 1-3 page 6, paragraph 1 abstract claims 1-7	1-7,9,18 8
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

28 September 2004

Date of mailing of the international search report

05/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Paquay, J

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP2004/006374

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 072 705 A (OVERMAN KENNETH) 17 December 1991 (1991-12-17) figures 1-3 abstract claims 1-22	1-7,9,18
X	US 3 200 796 A (VACLAV STOUPA ET AL) 17 August 1965 (1965-08-17)	1-6,9,18
A	figures 1-7 claims 1-11	8
A	US 1 899 374 A (WERLE MATHEW C) 28 February 1933 (1933-02-28) figures 1-5 claims 1-5	1-13,15, 17
A	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 08, 6 August 2003 (2003-08-06) & JP 2003 097206 A (HONDA MOTOR CO LTD), 3 April 2003 (2003-04-03) abstract	1-5
A	US 4 399 654 A (DAVID CONSTANT V) 23 August 1983 (1983-08-23) column 1, lines 7-9 column 9, lines 1-12 figure 19	1,6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/006374

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19744812	A	08-04-1999	DE 19744812 A1	08-04-1999
DE 4422720	A	04-01-1996	DE 4422720 A1	04-01-1996
WO 03036047	A	01-05-2003	DE 20117224 U1 WO 03036047 A1	13-12-2001 01-05-2003
US 5072705	A	17-12-1991	NONE	
US 3200796	A	17-08-1965	AT 255833 B DE 1426064 A1 GB 998144 A	25-07-1967 21-11-1968 14-07-1965
US 1899374	A	28-02-1933	NONE	
JP 2003097206	A	03-04-2003	NONE	
US 4399654	A	23-08-1983	DE 3376348 D1 EP 0087242 A1 JP 58152102 A	26-05-1988 31-08-1983 09-09-1983

THIS PAGE BLANK (USPTO)